




# why! Replacing W670SZQ1 BIOS battery

Written By: Felice Suglia

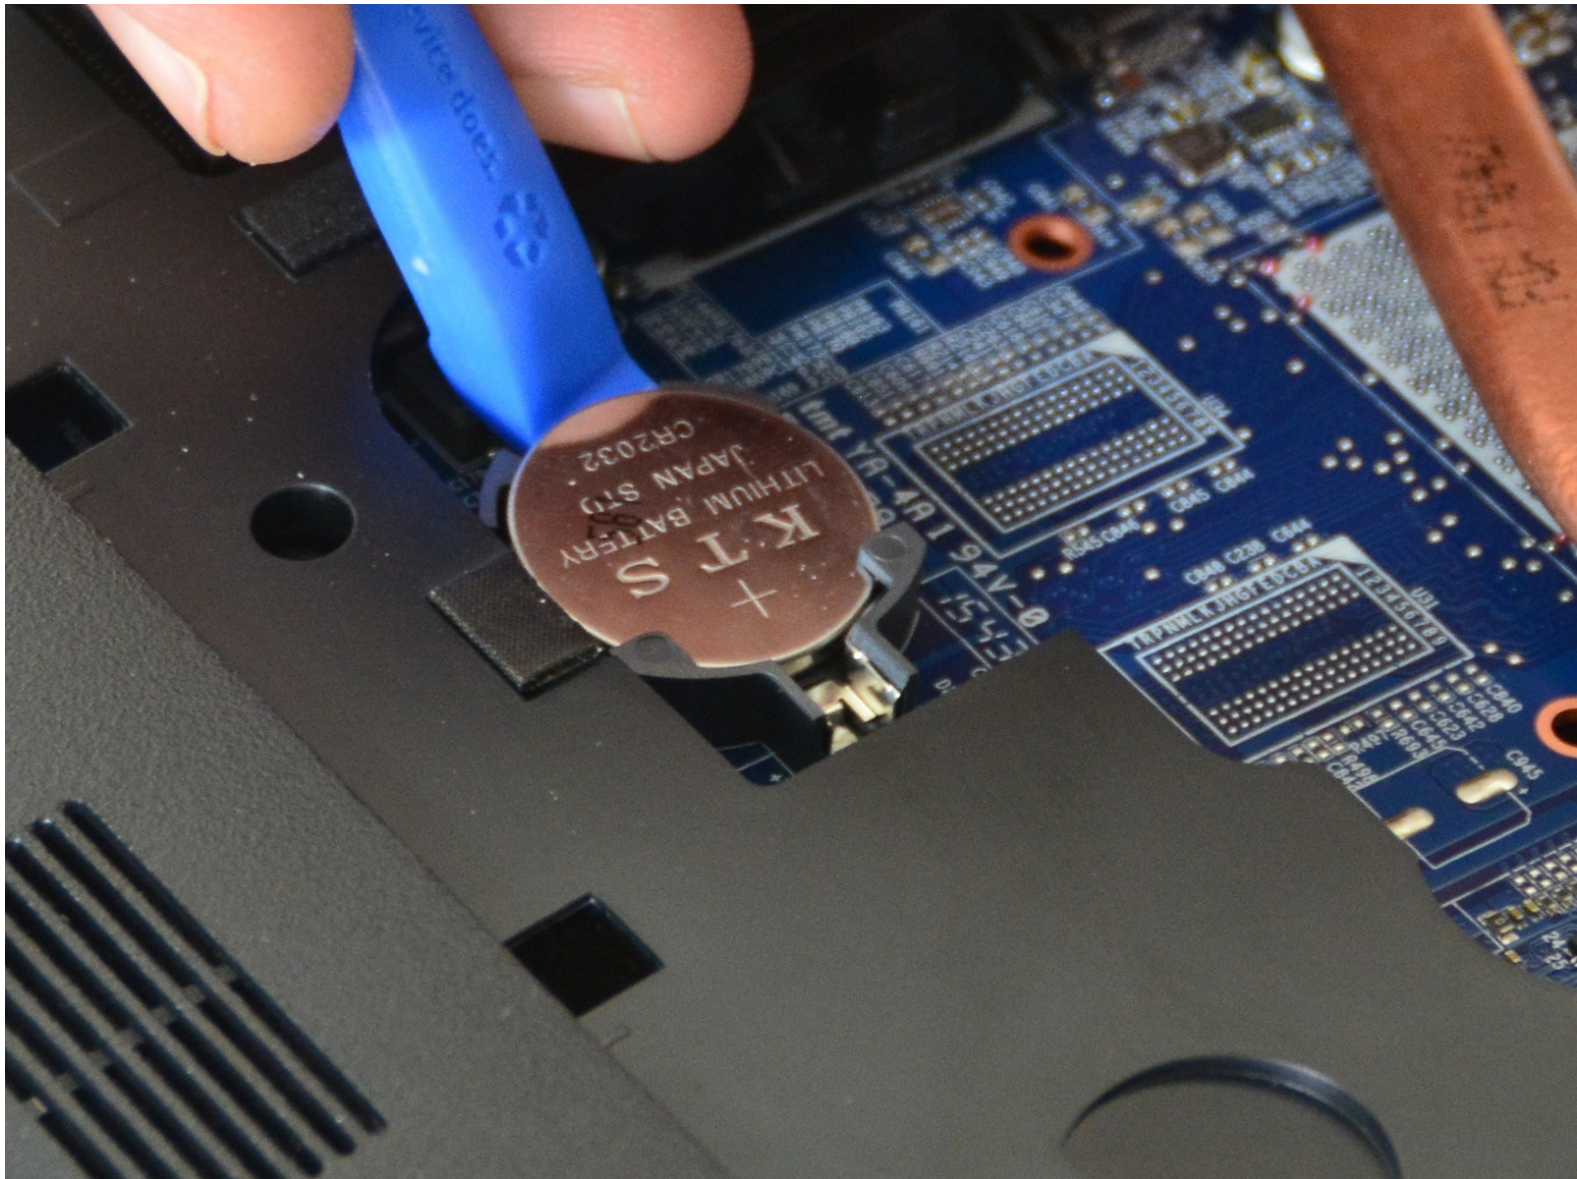


## Step 1 — accumulator



- Open the latch of the battery on the left side.
- Open the latch of the battery on the right side.
- Remove the battery where you simultaneously holding open the right bolt.


## Step 2 — Access to major components

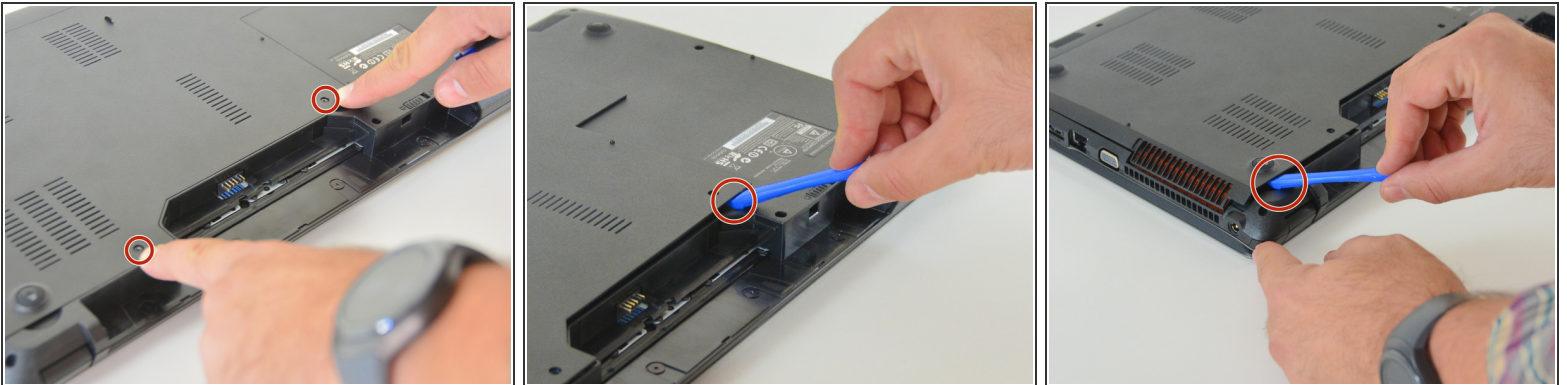

- Remove the Philips screwdriver to remove the two screws at the bottom of the cover.
- Lift the cover at the bottom right with the iFixit Opening Tool
- Lift the cover on the bottom left with the iFixit Opening Tool
- Finally, remove the cover so that the access to the main components is free.



## Step 3 — Battery BIOS

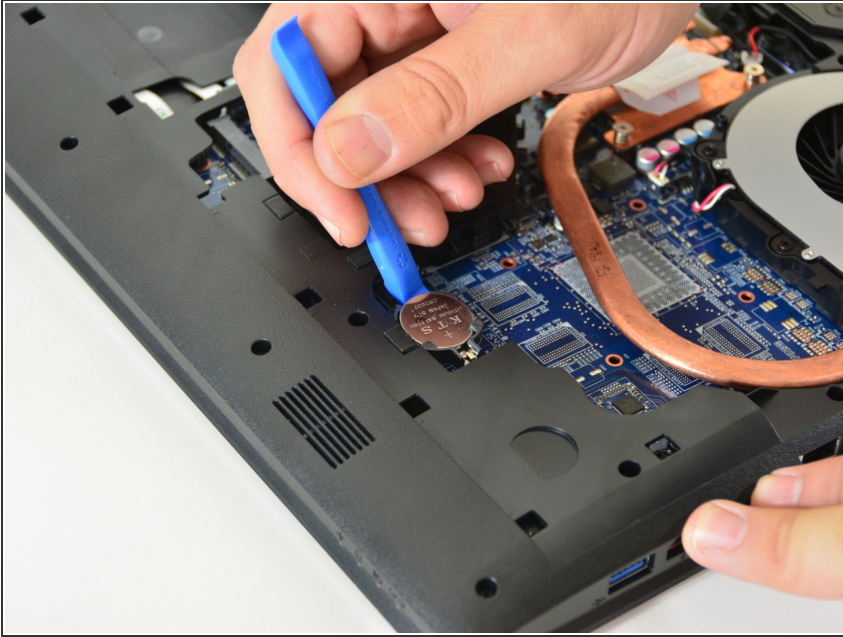

- BIOS battery carefully removed from its holder.
- Please do not throw batteries in the trash. In Switzerland, the electrical specialty shops are obliged all batteries and accumulators to accept for disposal.

Arbeite die Schritte in umgekehrter Reihenfolge ab, um dein Gerät wieder zusammenzubauen.

This document was last generated on 2017-06-20 08:34:53 AM.